



## TOLL 产品信息表 (封装厂 A)

### 一、丝印说明

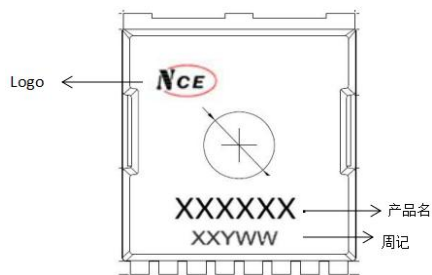


### 二、外形尺寸

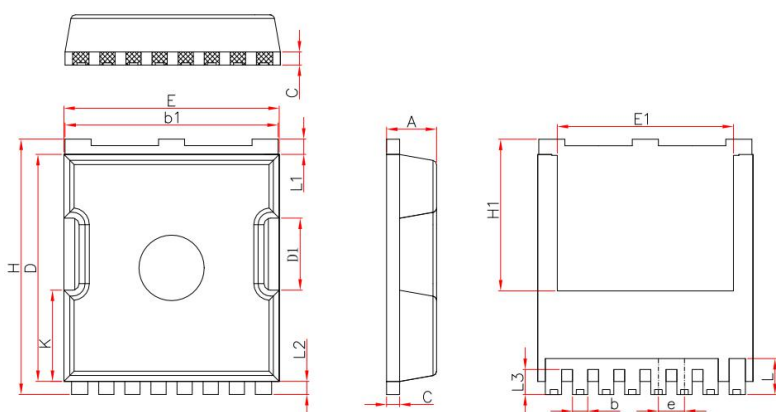

Symbol	Millimeters		
	Min.	Nom.	Max.
A	2.20	2.30	2.40
b	0.65	0.75	0.85
b1	9.70	9.80	9.90
C	0.50	0.60	0.70
D	10.30	10.40	10.50
D1	3.15	3.3	3.45
E	9.70	9.90	10.10
E1	8.00	8.10	8.20
e	1.10	1.20	1.30
H	11.6	11.7	11.8
H1	6.85	6.95	7.05
K	4.08	4.18	4.28
L	1.60	1.65	2.10
L1	0.60	0.70	0.80
L2	0.50	0.60	0.70
L3	1.05	1.20	1.30

### 三、编带图纸

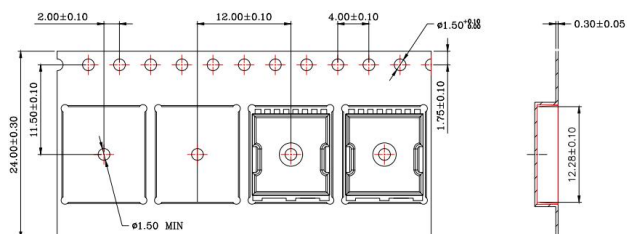

**Notes:**

1. All dimensions are in mm.
2. Material: Black Conductive Polystyrene Alloy
3. 10 sprocket hole pitch cumulative tolerance  $\pm 0.20\text{mm}$ .
4. Carrier camber is within 1 mm in 250 mm.
5. Packing length per 19" reel: 196.0 Meters.
6. There must not be foreign body adhesion and the state of the surface must be excellent.
7. Surface Resistance  $1 \times 10^5 \sim 1 \times 10^{11}$  OHMS/SQ

### 四、包装数量

包装方式	包装尺寸	包装数量 (箱)
编带	13寸	2000 只*8 盒=16000 只